


**SKILL**

**851-s6280w14**

SKILL ROUND LED SURFACE MOUNTED WALL LUMINAIRE made of aluminium, grey, transparent glass partially satined, light output direct, with converter, dimmability: phase section, cable black, IP65




**DRAWING**

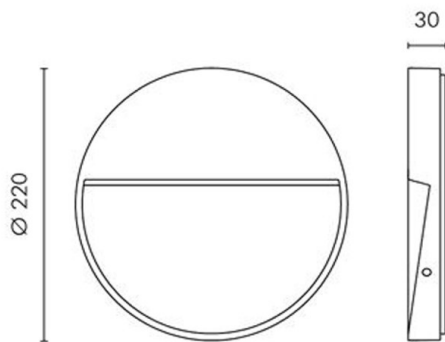

**TECHNICAL DETAILS**

System perform. [W]	8
Bulb type	LED
Luminous flux [lm]	427
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	phase section
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	30
Diameter [mm]	220
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK08
Net weight [kg]	1,25
Colour lamp	grey
Colour of glass/shade	partially satined
Electric wire	black
EAN-Number	8033357961696
Lifetime [h]	70 000 L80 B10
Energy efficiency cl.	E

**LIGHT DISTRIBUTION CURVE**

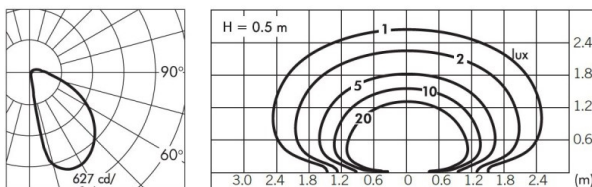

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.