


MAG

222-00005

MAG SDI SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, high quality glass lens beam 40°, light output direct / indirect, UGR <16, with converter, max. 500mA, dimmability: phase section, IP20




DRAWING

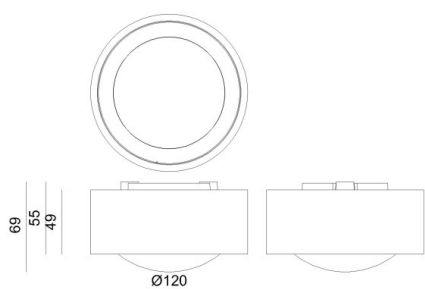

TECHNICAL DETAILS

System perform. [W]	16
Bulb type	LED
Luminous flux [lm]	1180
Current sec. [mA]	500
Colour temp. [K]	2700K
CRI	>90
UGR	<16
Optics	high quality glass lens
Converter	with converter
Dimming	phase section
Light output	direct / indirect
Beam angle [°]	40°
Voltage [V]	220-240V 50Hz
Material	aluminium
Height [mm]	69
Diameter [mm]	120
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	0,66
Colour lamp	white
RAL	9003
EAN-Number	9010870140493
Energy efficiency cl.	F
No. of luminaires B16A	56

LIGHT DISTRIBUTION CURVE

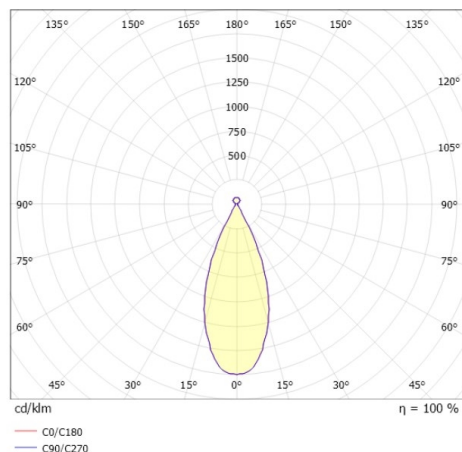

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.