

TRAIL

610-1252011419040

TRAIL LIGHT INSERT NB MOUNTING RAIL LIGHT INSERT made of aluminium, grey, similar to RAL 9006, linear optics beam 30°, light output direct, UGR <25, with converter, max. 250mA, dimmability: not dimmable, through wiring 7-polig, IP20




DRAWING



TECHNICAL DETAILS

|                        |                            |
|------------------------|----------------------------|
| System perform. [W]    | 37                         |
| Bulb type              | LED                        |
| Luminous flux [lm]     | 5490                       |
| Current sec. [mA]      | 250                        |
| Colour temp. [K]       | 3000K                      |
| CRI                    | >80                        |
| UGR                    | <25                        |
| Optics                 | high quality linear optics |
| Designer               | INHOUSE                    |
| Converter              | with converter             |
| Dimming                | not dimmable               |
| Light output           | direct                     |
| Beam angle [°]         | 30°                        |
| Voltage [V]            | 220-240V 50/60Hz           |
| Through wiring         | 7-polig                    |
| Material               | aluminium                  |
| Length [mm]            | 1696                       |
| Width [mm]             | 64                         |
| Height [mm]            | 16                         |
| IP protection class    | IP20                       |
| Voltage class          | protection cl. I           |
| Shock resistance       | IK06                       |
| Net weight [kg]        | 1,60                       |
| Colour lamp            | grey                       |
| RAL                    | 9006                       |
| EAN-Number             | 9010506596755              |
| Lifetime [h]           | L90 B10 100 000            |
| Energy efficiency cl.  | C                          |
| No. of luminaires B16A | 33                         |
| IFS suitable           | Yes                        |

LIGHT DISTRIBUTION CURVE

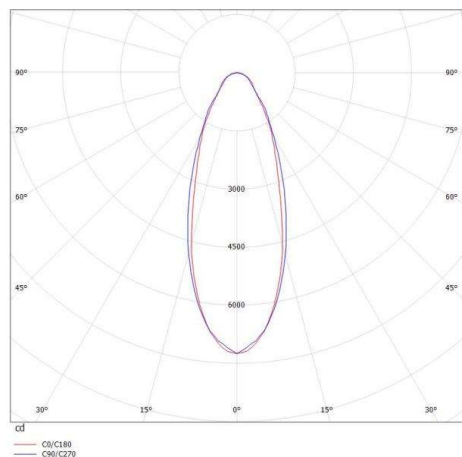

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.